


YOUR SOCIAL HOUSING PARTNER

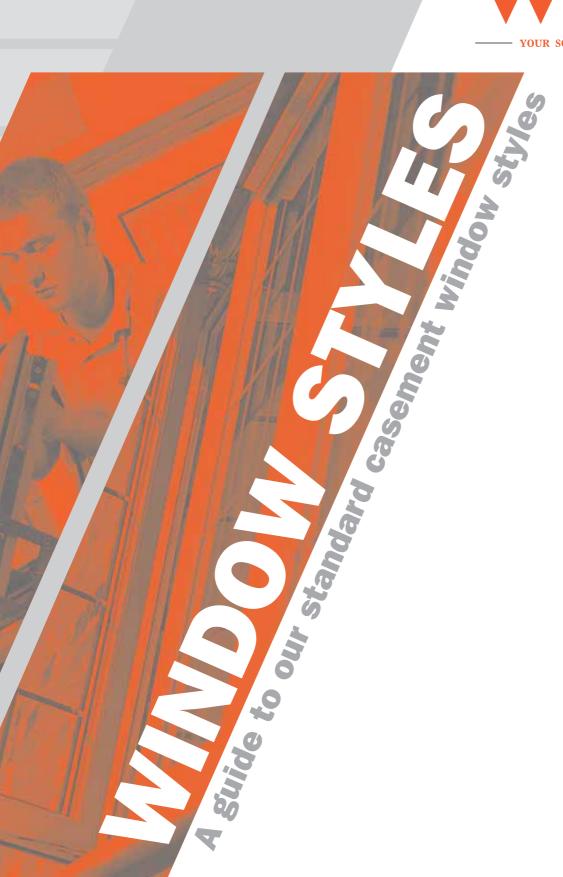

Since 1985 Wrekin Windows has only supplied PVC-U windows and doors to the social housing sector. In that time our factory has manufactured over half a million products, for local authority and housing association properties accross the UK. Our products hold every relevant quality standard available and is why we have a unique understanding of what specifiers, contractors and tenants actually want.

As a specialist in social housing we embrace the recommendations of Sir Michael Latham and Sir John Egan and we apply Best Value and Partnering techniques to every contract. That guarantees you an integrated and co-ordinated team within our business as well as with our partners.

Notes:

- Our **Best Value** range is easier to fabricate and therefore more cost-effective than windows in our Non-Preferred range.
- All products are shown from outside. Left and right hand versions of the same style are given a different reference number.
- Style reference numbers remain the same regardless of transom or mullion positioning. They are illustrated here in regular proportions for identification purposes only. Note: Style 20 is illustrated in three popular variants.
- The need to provide clear egress openings in compliance with Building Regulations 1991 Fire Safety, approved Document B, section B1, will often determine styling and mullion/transom positioning. Our Technical Department will be happy to provide design assistance if required on 01952 205000.
- Storey height windows should have safety/security glazing specified to the low level areas or alternatively select from range of solid infill panels.
- Style/price comparisons may fluctuate if safety glazing is specified but is only necessary on the lowest level panes.
- Other special styles are available subject to manufacturing and technical limitations.























F

380

Casement Window Styles Range

Non-Preferred Range


200 - 262 Casement Windows

Conventions:

<u>HANDING</u> - VIEWED FROM OUTSIDE - point to hinge side, i.e. style 10 is left side hung hinge - style 12 is top hung hinge.

<u>IRANSOMS</u> - 400mm nom. drop on high level top hung fanlights and 400 up on low level fixed lights.

Measured edge of outer frame to centre of transform.

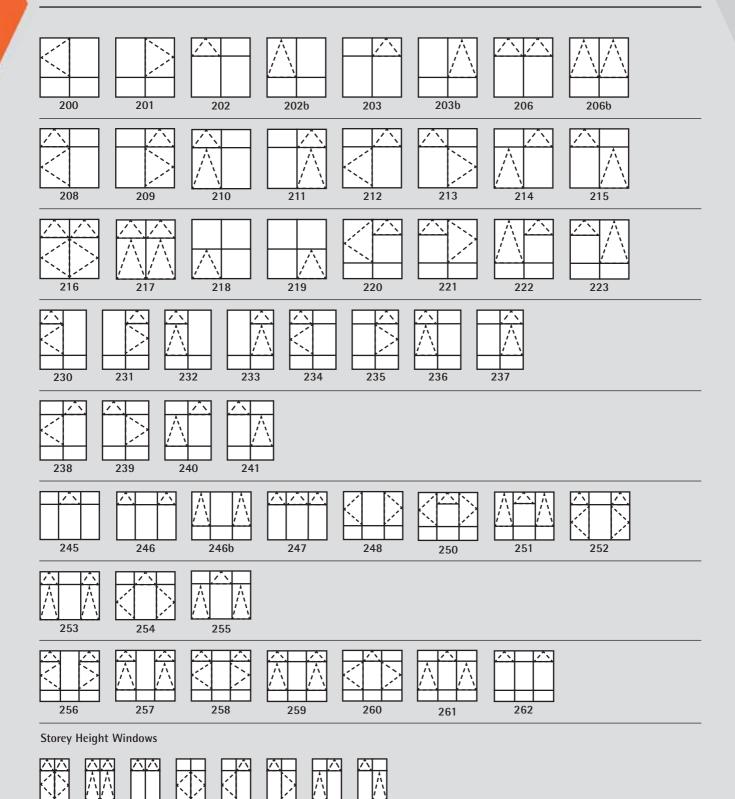



Casement Window Style Range

Non-Preferred Range

266 - 299 Casement Windows


YOUR SOCIAL HOUSING PARTNER —

Unit D1-D4 • Stafford Park 4 • Telford • Shropshire • TF3 3BA
Tel: 01952 205000 • Fax: 01952 290956
Email: info@wrekin-windows.co.uk • Web: www.wrekin-windows.co.uk

Conventions: HANDING - VIEWED FROM OUTSDIE - point to hinge side, i.e. style 10 is left side hung hinge - style 12 is top hung hinge.

<u>TRANSOMS</u> - 400mm nom. drop on high level top hung fanlights and 400 up on low level fixed lights.

Measured edge of outer frame to centre of transform.

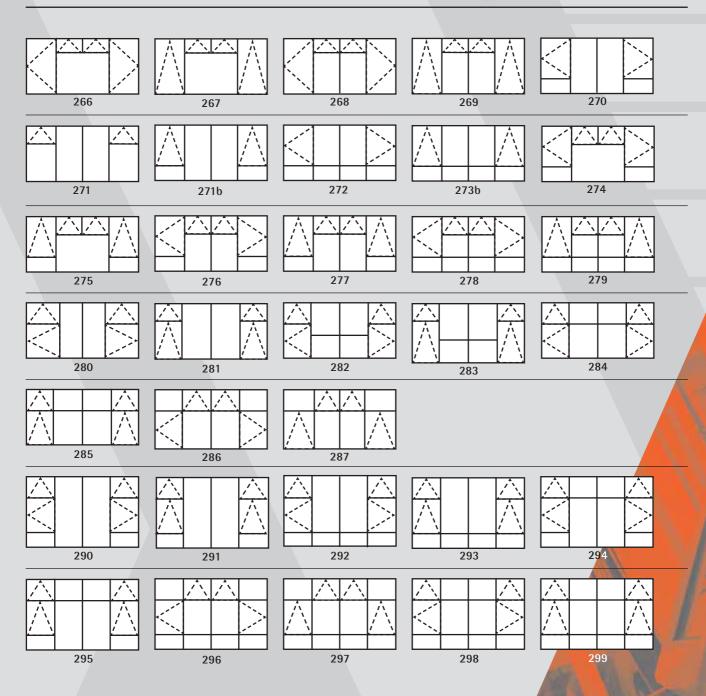

Casement Window Style Range

BEST VALUE RANGE

01 - 199 Casement Windows

Conventions:

HANDING - VIEWED FROM OUTSDIE - point to hinge side, i.e. style 10 is left side hung hinge - style 12 is top hung hinge.

TRANSOMS - 400mm nom. drop on high level top hung fanlights and 400 up on low level fixed lights.

Measured edge of outer frame to centre of transform.





Casement Window Style Range

BEST VALUE RANGE

300 - 379 Storey Height Windows

Conventions:

<u>HANDING</u> - VIEWED FROM OUTSDIE - point to hinge side, i.e. style 10 is left side hung hinge - style 12 is top hung hinge.

<u>TRANSOMS</u> - 400mm nom. drop on high level top hung fanlights and 400 up on low level fixed lights.

Measured edge of outer frame to centre of transform.

